





PIXMATS5160 Cartridge

EASY TO OPERATE

Every function is easier with the manually adjustable front panel, LCD display and simple interface. The clear buttons mean quick access to the printer's primary functions, whether that be printing, copying or scanning.

GET CREATIVE

Whether you are printing sharp text or beautiful photos, the use of Canon's FINE cartridge system produces crisp document text and high-quality images. Print your documents and photos on a range of different paper sizes, from business cards to Instagram-style images, on square sizes! You can even print borderless 4"x6" photos in approx. 17 seconds.

FUNCTIONAL

The PIXMA TS5160 has features such as auto duplex prints, saving time and money with auto duplex printing function, which automatically prints on both sides of paper. It also has a dual paper feeder, get flexible with the way your printer receives paper - either through rear paper feeding or via front paper cassette. The paper output tray is also automatically expandable.

ACHIEVE SIMPLE SETUP WITH WIRELESS CONNECTIVITY

Printing, scanning, copying and connecting to the cloud has never been easier – simply connect to the Canon PRINT app or PIXMA Cloud Link to get underway. You can also print wirelessly directly from you mobile devices such as your smartphone, tablet, or laptop via AirPrint (iOS) or Mopria (Android)*1

1: AirPrint and Mopria are available for download via the Apple Store (iOS) and Play Store (Android).

What inks can I use with my printer?

Ink Yield

Ink Yield A4 document: 600 4"x6" photo: 7560

Ink Yield A4 document: 180 A4 document: 400 4"x6" photo: 5235 4"x6" photo: 2465

Ink Yield A4 document: 400

4"x6" photo: 150

















GENERAL FEATURES	
Model	PIXMA TS5160
Ink Type	FINE11 Cartridge
Maximum Print Resolution	4,800 dpi x 1,200 dpi*1
Size	Approx. 425 x 315 x 147 mm
	Approx. 16.8 x 12.5 x 5.8 inch
Weight	Approx. 6.5 kg Approx. 14.3 lbs
Display	2.5" / 6.2cm TFT colour LCD
Interface	USB-B Hi-Speed
Connectivity	Wireless LAN 2.4GHz, Direct Connection (Wireless LAN)
Auto Double Sided Printing	Available
PRINT SPEED	
Document: Colour ^{*2}	Approx. 6.8 ipm
Document: Black & White ^{*2}	Approx. 13.0 ipm
Photo (4" x 6")* ²	43 seconds
POWER CONSUMPTION	
OFF	Approx. 0.2 W
Copying ^{*3} USB connection to PC	Approx. 14 W
Standby (MFP: scanning lamp is off) USB connection to PC	Approx. 0.7 W
Standby (all ports connected, MFP: scanning lamp is off)	Approx. 1.5 W
Time to enter Standby mode	Approx. 11 min
Input Power	AC 100-240 V, 50 / 60 Hz
ENVIRONMENT	
Operating Environment* ⁴	Temperature: 5 - 35 °C Humidity: 10 - 90 %RH (no dew condensation)
Recommended Environment*5	Temperature: 15 -30 °C Humidity: 10 - 80 %RH (no dew condensation)
Storage Environment	Temperature: 0 - 40 °C Humidity: 5 - 95 %RH (no dew condensation)
ACOUSTIC NOISE (PC PRINT)	
Quiet Mode	Available
Acoustic Noise (PC print) Plain Paper* ⁶	Approx. 49.0 dB(A)
PRINT HEAD / INK	
Number of Nozzles	Total 1,792 nozzles (PGBK: 640 nozzles, C/M/Y: 384 nozzles)
Compatible Inks	PGBK: PG-640, PG-640XL, PG-640XXL
	Colour: CL-641, CL-641XL.
PRINTABLE WIDTH	Up to 202.2 mm (8 inch) Porderlass: Up to 240 mm (8 5 inch)
	Up to 203.2 mm (8 inch), Borderless: Up to 216 mm (8.5 inch)




PRINTABLE AREA	
Borderless Printing*7	Top / Bottom / Right / Left margin: each 0 mm
Bordered Printing	Top margin: 3 mm, Bottom margin: 5 mm, Left/Right margin: each 3.4 mm (LTR/LGL: Left: 6.4 mm, Right: 6.3 mm)
Bordered Auto 2-Sided Printing	Top margin: 5 mm, Bottom margin: 5 mm, Left/Right margin: 3.4 mm (LTR: Left: 6.4 mm, Right: 6.3 mm)
SUPPORT MEDIA	
Rear Tray	Plain Paper, High Resolution Paper (HR-101N), Photo Paper Pro Platinum (PT-101), Photo Paper Pro Luster (LU-101), Photo Paper Plus Glossy II (PP-301), Matte Photo Paper (MP-101), Photo Paper Glossy (GP-701), T-Shirt Transfer, Envelope
Front Tray	Plain Paper
PAPER SIZE	
Rear Tray	A4, A5, B5, LTR, LGL, 4"x6", 5"x7", 7"x10", 8"x10", Envelopes (DL, COM10), Square (5"x5", 3.5"x3.5"), Card Size(91 x 55mm) [Custom size] width 55mm - 215.9 mm, length 89mm - 676mm
Front Tray	A4, A5, B5, LTR [Custom size] width 148.0 mm - 215.9 mm, length 210mm - 297mm
PAPER SIZE (BORDERLESS)* ⁸	
	A4, LTR, 4"x6", 5"x7", 7"x10", 8"x10", Square (5"x5"), Card Size (91 x 55mm) [Custom size] Rear Tray; width 55mm - 215.9 mm, length 89mm - 676mm Cassette; width 148.0 mm - 215.9 mm, length 210mm - 297mm
PAPER HANDLING (MAXIMUM NUMBER)	
Rear Tray	Plain Paper - A4, A5, B5, LTR = 100, High Resolution Paper (HR-101N) A4 = 80
Front Tray	Plain Paper (64 g/m2): 100
PAPER WEIGHT	
Rear Tray	Plain Paper: 64-105 g/m2, Canon specialty paper: max paper weight : approx. 300 g/m2 (Photo Paper Pro Platinum PT-101)
Front Tray	Plain Paper: 64 g/m2 -105 g/m2



SCANNER FUNCTIONS ^{*9}	
Scanner Type	Flatbed
Optical Resolution ^{*10}	1,200 x 2,400 dpi
Scanning Bit Depth (Input/Output)	Grayscale: 16 bit / 8 bit Colour: RGB each 16 bit / 8 bit
Maximum Document Size	A4 / LTR (216 x 297 mm)
COPY FUNCTIONS	
Maximum Document Size	A4/LTR (216 x 297 mm)
Compatible Media	Plain Paper, Photo Paper Pro Platinum (PT-101), Photo Paper Plus Glossy II (PP-301). Photo Paper Pro Luster (LU-101), Photo Paper Plus semi-gloss (SG-201), Glossy Photo Paper "Everyday Use" (GP-701), Matte Photo Paper(MP-101)
Image Quality	3 positions (Draft, Standard, High)
Multiple Copy	Black & White / Colour: max. 99 pages
PRINTING SOLUTION	
Available for ^{*12}	AirPrint / Mopria / Google Cloud Print / Bluetooth / PIXMA Cloud Link / Canon PRINT (for iOS / Android) / Camera Direct
Minimum System Requirements	Windows® 10, Windows 8.1, Windows 7 SP1 MacOS v10.12 ~ 10.14, OS X 10.11.6, iOS®, Android ^{tm,} Windows 10 Mobile



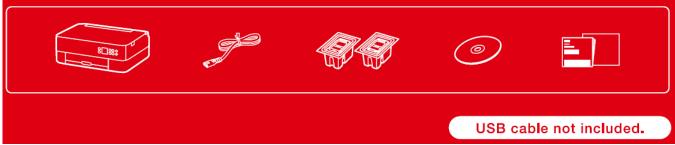

What's in the Box?

- Printer
- Power cord
- Ink cartridges setup
- CD setup
- Getting started guide

PIXMATS5160 Cartridge DISCLAIMERS

*1: Ink droplets can be placed with a pitch of 1/4800 inch at minimum.

*2: Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734. Photo print speed is based on the default setting using ISO/JIS-SCID N2 on Photo Paper Plus Glossy II and does not take into account data processing time on host computer. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.

*3: Copy: When copying ISO/JIS-SCID N2 (printed by inkjet printer) on A4 size plain paper using default settings. Specifications are subject to change without notice.

*4: The performance of the printer may be reduced under certain temperature and humidity conditions. *5: For the temperature and humidity conditions of papers such as photo paper, refer to the paper's packaging or the supplied instructions.

*6: Acoustic Noise is measured based on ISO7779 standard with default setting.

*7: Paper types NOT supported for borderless printing are as follows: Envelope, High Resolution Paper, T-Shirt Transfer, Photo Stickers

*8: The following media does NOT support borderless printing. : High Resolution Paper, T-Shirt Transfer, Photo Stickers

*9: TWAIN driver (ScanGear) is based on the TWAIN specification V1.9 and requires the Data Source Manager comes with the operating system.

*10: Optical resolution is a measure of maximum hardware sampling resolution, based on ISO 14473 standard.

*11: Black & white document fax transmission speed is based on default setting using ITU-T No.1 chart. Color document fax transmission speed is based on default setting using Canon Color Fax Test Sheet. Actual transmission speed may vary depending on document complexity, fax settings at receiving end, and line conditions etc.

*12: Resolution may be changed between Direct print and printing from PC.

Standard disclaimers:

- If your inkjet printer is found defective within the applicable manufacturer warranty period (1 Year), we'll replace it with the same, or an equivalent model. Excludes damage caused by external factors. Canon's full replacement promise is in addition to your rights under Australian Consumer Law which, depending on the type of fault, includes repair, replacement or a refund. For full terms see: www.canon.com.au/printassist or the card in the printer box. Only for products purchased at Authorised Canon Australia retailers
- Photo print speed is based on the default setting using ISO/JIS-SCID N2 on Photo Paper Plus Glossy II and does not take into account data processing time on host computer. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.
- AirPrint and Mopria are available for download via the Apple Store (iOS) and Play Store (Android).
- USB cable not included.

Note:

A complete set of ink cartridges with ink available in each cartridge is required for all functions including copy, print and scan. Some functions (e.g. PIXMA Cloud Link, scan to cloud or scan to email) may not work unless genuine Canon inks are used and/or an internet connection is established.





www.canon.com.au www.canon.co.nz